



NEW COLLECTION

Recreation Leisure

Sports Flooring

Gerflor[®]


All Gerflor® experience for a highly performing recreational floor: environmental friendly, low VOC, no solvent, no heavy metal and 100% recyclable suitable for leisure and sports activities.

RECREATION LEISURE 45

 2 m	 PUR Protect®	 100 % recyclable
--	--	--




6563 Menta

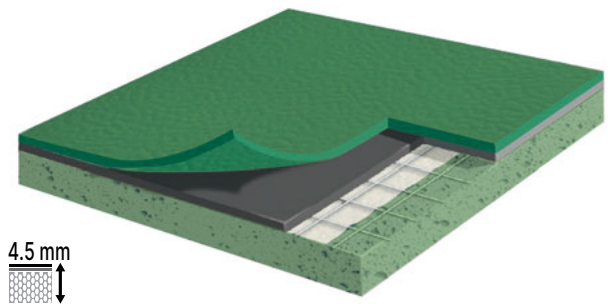


RECREATION LEISURE 65

 2 m	 PUR Protect®	 100 % recyclable
--	--	--

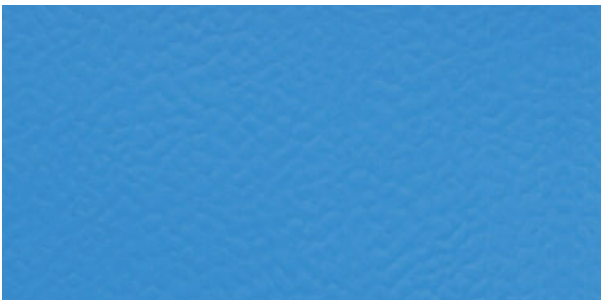


2402 Azul

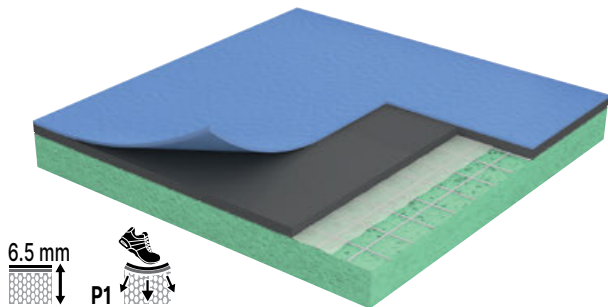




6160 Naranja

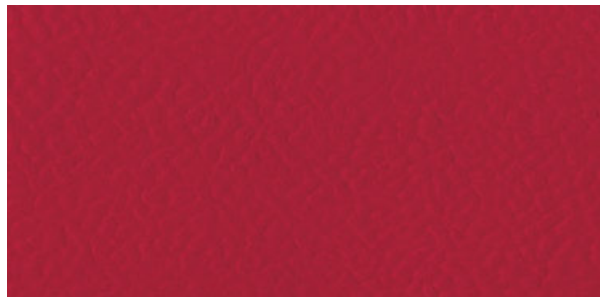

6154 Roja

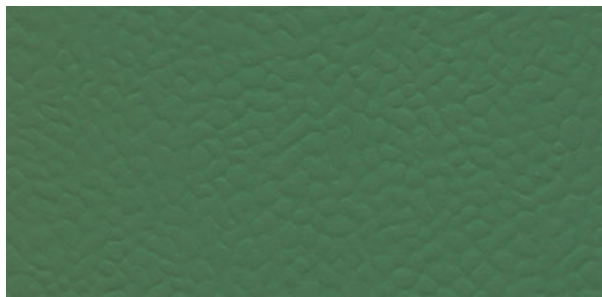


6556 Verde



2711 Gris




6431 Teal

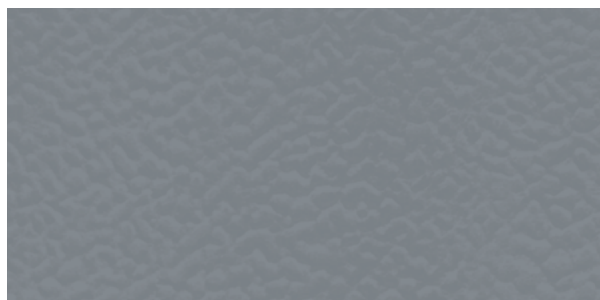

6873 Anthracite



6614 Oceano*

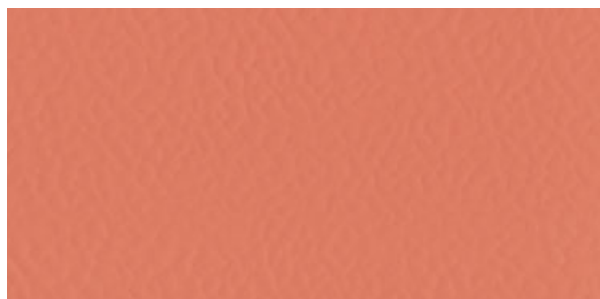

6157 Rosa*



6062 Canadian Maple



6058 American Oak

PRODUCT CHARACTERISTICS

PRODUCT DESCRIPTION	Standard	Requirement	Unit	Results	Results
Surface treatment	-	-	-	PUR Protect®	PUR Protect®
Foam	-	-	-	Closed cell foam	Closed cell foam
Thickness	ISO 24346	-	mm	4.5	6.5
Weight	ISO 23997	-	kg/m²	2.8	4
Length	ISO 24341	-	lm	20.5	20.5
Width	ISO 24341	-	m	2	2

SPORT PROPERTIES

Shock absorption	EN 14808	25-75	%	-	≥ 25
Vertical deformation	EN 14809	≤ 5.0	mm	≤ 3.5	≤ 2.0
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110	80 to 110
Ball bounce	EN 12235	≥ 90	%	≥ 90	≥ 90

TECHNICAL CHARACTERISTICS

Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350
Impact resistance	EN 1517	≥ 8	Nm	≥ 8	≥ 8
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5

CLASSIFICATION

TVOC after 28 days	ISO 16000 - 6	µg/m³	< 100	< 100	< 100
Certification	-	-	-	Floorscore®	Floorscore®
Fire resistance	EN 13501-1	-	-	C _{fl} -s1	C _{fl} -s1
Anti-bacterial activity ⁽¹⁾	ISO 22196	-	-	> 99% 24H	> 99% 24H
Anti-viral activity	ISO 21702	-	-	> 99% 24H	> 99% 24H

DECLARATION OF PERFORMANCE

	EN14904	-	-	Fire Sliding Coefficient Abrasion Resistance Resistance to rolling load	Fire Sliding Coefficient Abrasion Resistance Resistance to rolling load
---	---------	---	---	--	--

(1) The implementation of an effective cleaning regime is the most important defence against infections.
(2) Only for Recreation Leisure 65



Gerflor

Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

Be connected!



#Gerflor



www.gerflor.asia

we care / we actOur Commitments for a Sustainable future



CARBON
FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED
CONTENT***
10 % by2025



RECYCLED
CONTENT
30 % by2025



ADHESIVE
FREE**
35 % by2025



ANNUAL VOLUME
RECYCLED
60 000 t by2025

