

SEMi 太格



SEMIFLOR

太格彩雅石紋 PVC 透心地板

Easycare™ Vinyl Flooring

Easycare™ Vinyl Flooring

彩雅石紋PVC透心地板

Mipolam® Concept™

全面升級



SEMI 太格

Easycare™ Vinyl Flooring

Mipolam® Concept™ 彩雅石紋PVC透心地板

- 高性能的彈性透心地板
- Easycare™ 表面處理: 易維護
- 高流量和高耐磨性
- 含有抑菌和防黴的作用
- 抗靜電
- 無方向性的多色設計, 有14種顏色可供選擇

2.0mmx2mx20m



① easycare™ 表面處理 全面升級

② 同質透心地板



Easycare™ Vinyl Flooring

彩雅石紋PVC透心地板

Mipolam® Concept™

SEMIFLOR

Easycare™ Vinyl Flooring

彩雅石紋PVC透心地板


Mipolam® Concept™



34-43



全面升級

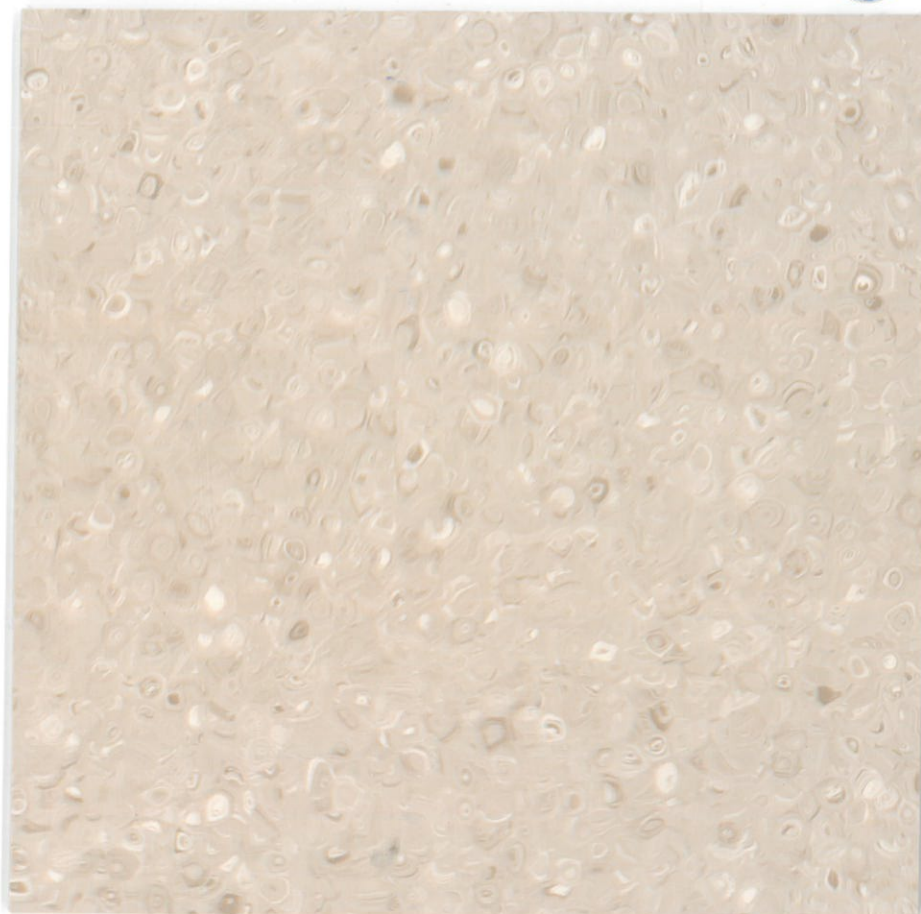


5048 Fairy dust




5031 Mocca Foam



5030 Toffee

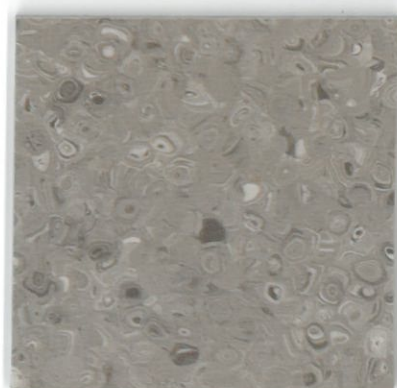

5042 Tiramisu

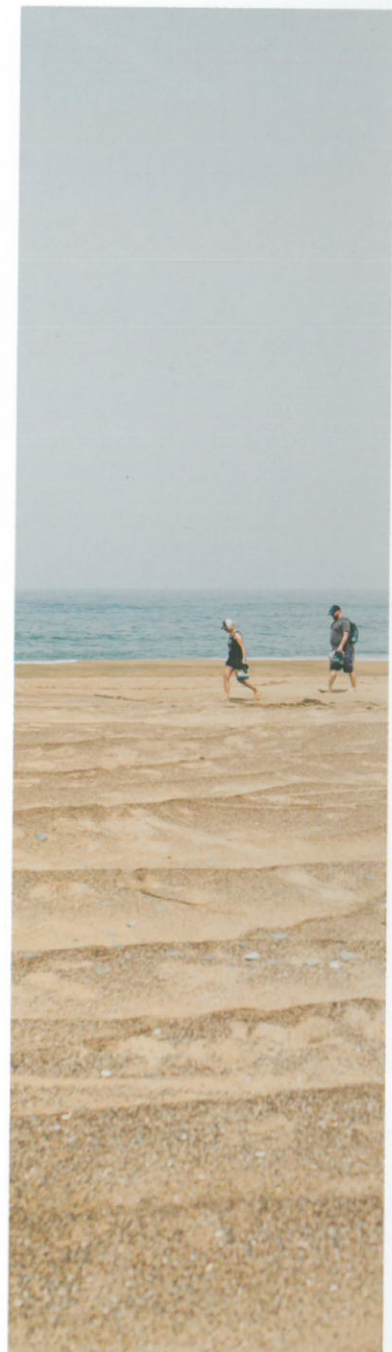


SEMIFLOR

EasyCare™ Vinyl Flooring
Mipolam® Concept™


彩雅石紋PVC透心地板




5039 Grey Moon

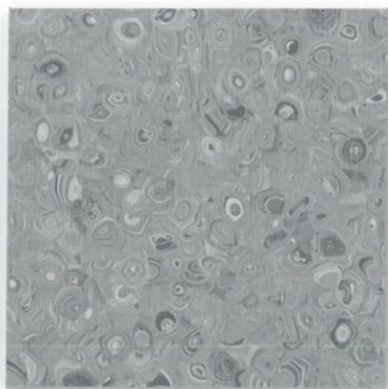

5038 Smoke Gray

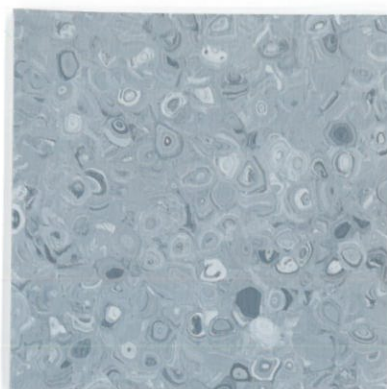


5040 Dove Grey

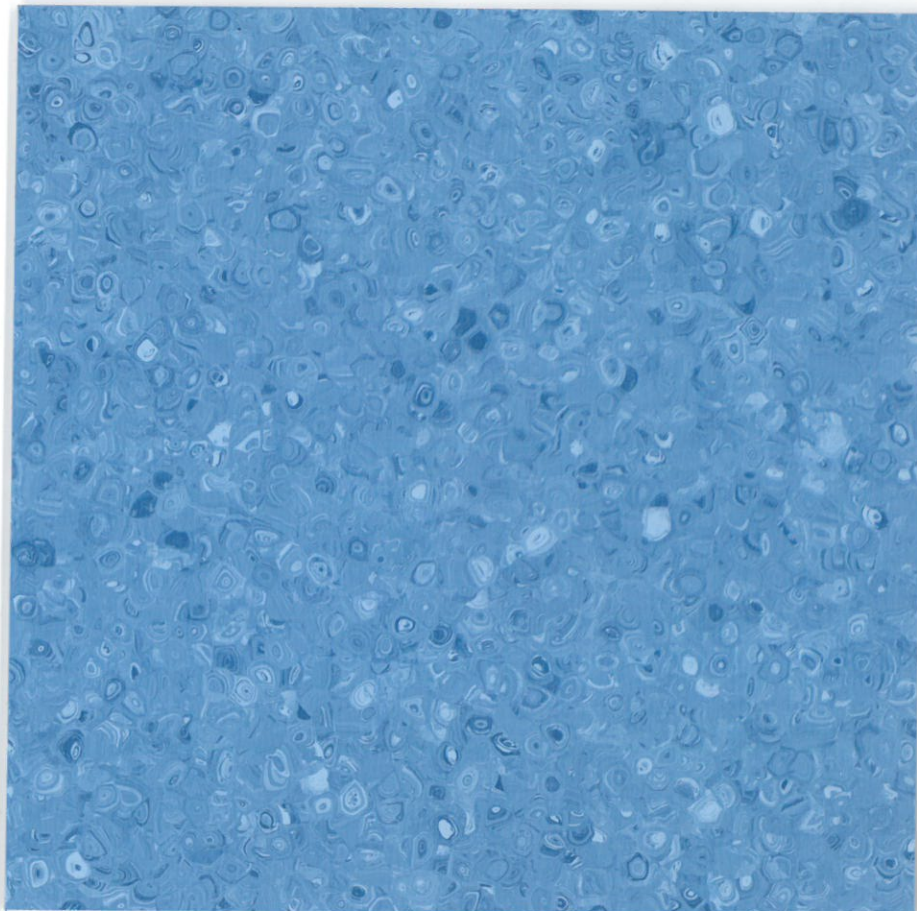


5024 Blue Lake



5023 Blue Galaxy ⊗ 非庫存色

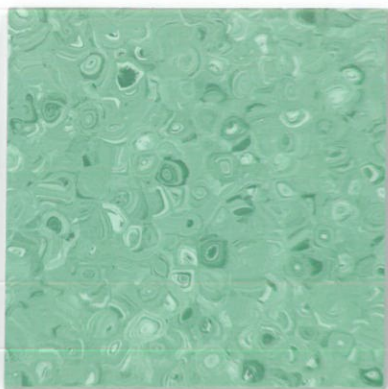

5034 Dark Green

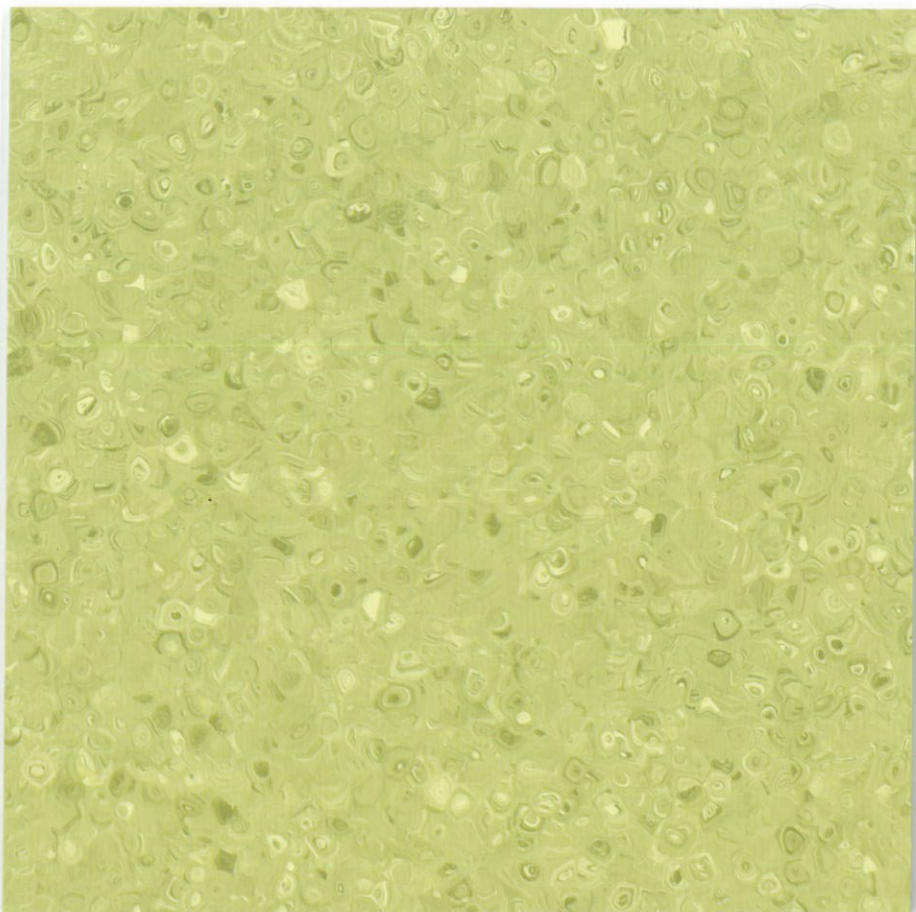


5035 Springfield



5032 Corn Flour



5045 Purple Mist ⊗非庫存色

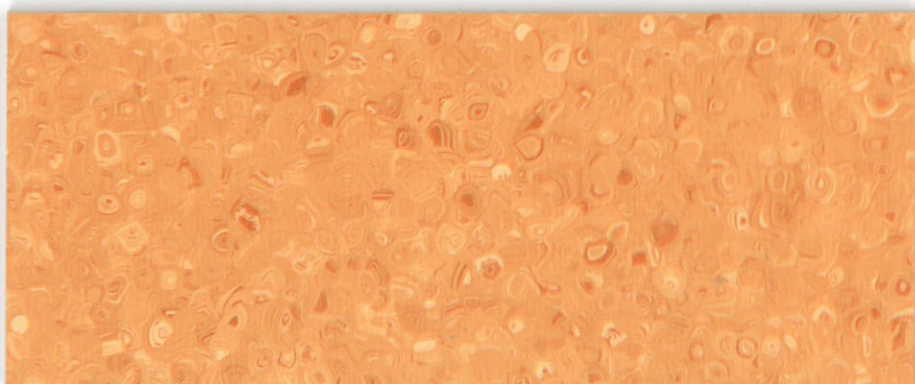

5029 Golden Sunset

Easycare™ Vinyl Flooring

Mipolam® Concept™ 彩雅石紋PVC透心地板

SEMI 太格

since 1981

適用場所：醫院・安養院・學校・幼稚園・商用空間

全面升級



DESCRIPTION / 規格

Total thickness / 總厚度	ISO 24346 (EN 428)	mm	2
Weight / 重量	ISO 23997 (EN 430)	g/m2	2980
Width of sheet / 寬度	ISO 24341 (EN 426)	cm	200
Length of sheet / 長度	ISO 24341 (EN 426)	lm	20

CLASSIFICATION / 類別

Norm / Product specification / 產品規範	-	-	ISO 10581 (EN 649)
European classification / 歐洲分級	ISO 10874 (EN 685)	class	34 - 43
Fire rating / 防焰性	EN 13501-1	class	Bfl-s1
Static electrical propensity / 靜電抗阻	EN 1815	KV	<2
Electrical resistance / 電阻	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry / 止滑等級(乾)	EN 13893	-	≥0.3
Slip resistance wet / 止滑等級(濕)	DIN 51130	class	R9

PERFORMANCES / 性能

Dimensional stability / 尺寸穩定性	ISO 23999 (EN 434)	%	≤ 0.4
Castor chair test / 腳輪耐磨性	ISO 4918 (EN 425)	-	OK
Thermal conductivity / 熱傳導	ISO 10456 (EN 12524)	W/(m.K)	0.25
Colour fastness / 顏色堅牢度	ISO 105 - B02	degree	≥6
Chemical products resistance / 抗化學藥品性	ISO 26987 (EN 423)	-	OK
Anti-bacterial activity / 抗菌 (E.coli - S.aureus - MRSA) 大腸桿菌 - 抗藥性金黃色葡萄球菌	JIS Z 2801	-	>99% Inhibits growth
Surface treatment / 表面處理	-	-	EASYCARE™

ENVIRONMENT / INDOOR AIR QUALITY / 環境 / 室內空氣品質

TVOC after 28 days / 28天後TVOC排放量	ISO 16000 - 6	µg/m ³	<10
Certification / 認證	-	-	Floorscore®

CE MARKING / CE 認證



EN 14041

符合歐洲標準



COMPOSITION

100% REACH
compliant



INDOOR AIR QUALITY

100 times lower than
norm requirements
(TVOC < 10 µg/m³
after 28 days)



RECYCLED CONTENT

25%



RECYCLABILITY

100%



LCA

Eco-designed according
to a product specific
life cycle analysis



WELLNESS

Gerflor
theflooringgroup



太格官網
semiflor.com.tw